



US006578736B2

(12) **United States Patent**
Spivey

(10) **Patent No.:** **US 6,578,736 B2**
(45) **Date of Patent:** **Jun. 17, 2003**

- (54) **CARTON WITH AN IMPROVED DISPENSING FEATURE**
- (75) Inventor: **Raymond Rudolph Spivey, Mableton, GA (US)**
- (73) Assignee: **Riverwood International Corporation, Atlanta, GA (US)**
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 87 days.
- (21) Appl. No.: **09/757,714**
- (22) Filed: **Jan. 9, 2001**

4,375,258 A	3/1983	Crayne et al.	432/141
4,396,143 A	8/1983	Killy	221/305
4,417,661 A	11/1983	Roccaforte	229/232
4,726,471 A	2/1988	Whately et al.	206/554
4,919,266 A	4/1990	McIntosh, Jr. et al.	206/434
4,974,771 A	12/1990	Lavery	229/117.13
5,123,589 A	6/1992	Cote	229/232
5,137,211 A	8/1992	Summer et al.	229/164
5,170,934 A	12/1992	Lemoine	229/101
5,279,440 A	1/1994	Fougeres et al.	220/228
5,368,194 A	11/1994	Oliff et al.	221/305
5,622,309 A	4/1997	Matsuda et al.	229/243
5,722,584 A	3/1998	Fujiwara	229/120.15
5,775,574 A	7/1998	Whitnell	229/120.18
5,878,947 A	3/1999	Hoy et al.	229/122.1
6,105,854 A	8/2000	Spivey et al.	229/122.1
6,176,419 B1	1/2001	Holley, Jr.	229/122.1
6,283,293 B1	9/2001	Lingamfelter	206/427

(65) **Prior Publication Data**

US 2002/0088820 A1 Jul. 11, 2002

- (51) **Int. Cl.⁷** **A47F 1/04**
- (52) **U.S. Cl.** **221/305; 229/221**
- (58) **Field of Search** **221/305, 303, 221/33, 256; 229/221, 122.1; 206/427**

FOREIGN PATENT DOCUMENTS

DE	7510538	8/1975
DE	8514718.4	8/1985
DE	3612594 A1	10/1987
EP	0849189 A1	6/1998
WO	WO 96/29260	9/1996
WO	WO 97/21607	6/1997

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,541,143 A	6/1925	Hoile	229/231
2,718,301 A	9/1955	Palmer	206/65
2,723,027 A	11/1955	Guyer	206/65
2,842,304 A	7/1958	Ringler	229/51
2,930,516 A	3/1960	Fowle et al.	229/7
2,975,891 A	3/1961	Stone	206/65
3,263,861 A	8/1966	Carr	221/302
3,265,283 A	8/1966	Farquhar	229/7
RE26,083 E	9/1966	Forrer	220/115
3,300,115 A	1/1967	Schauer	229/27
3,356,279 A	12/1967	Root	229/17
3,517,858 A	6/1970	Farqijar	221/305
3,540,581 A	11/1970	Koolnis	206/193
3,765,327 A	10/1973	Vargo	101/232
3,894,681 A	7/1975	Arneson et al.	221/305
4,000,811 A	1/1977	Hardison et al.	229/243
4,030,596 A	6/1977	Snyder et al.	206/45.26
4,214,660 A	7/1980	Hunt, Jr.	206/427
4,222,485 A	9/1980	Focke	206/141
4,364,509 A	12/1982	Holley, Jr. et al.	229/25

OTHER PUBLICATIONS

US2002/0070139A1, Published Jun. 13, 2002; effective filing date Dec. 12, 2000.*
US2002/0070139A1, published Jun. 2002, *Bates*.


* cited by examiner

Primary Examiner—Kenneth W. Noland
(74) *Attorney, Agent, or Firm*—Womble, Carlyle, Sandridge & Rice, PLLC; James F. Vaughan; Steve M. McLary

(57) **ABSTRACT**

A carton with an improved dispenser at one of the carton which preserves the integrity of the carton when the carton is opened by permitting a bottom end flap attached to the bottom panel to remain in place and also a portion of each side end flap that is adjacent to the bottom end flap. This dispenser may also provide a safety net for the first container that is automatically dispensed when the carton is opened.

52 Claims, 4 Drawing Sheets

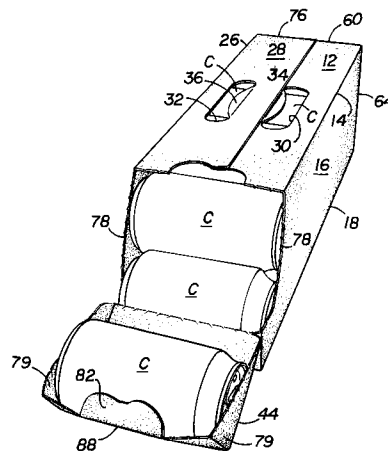

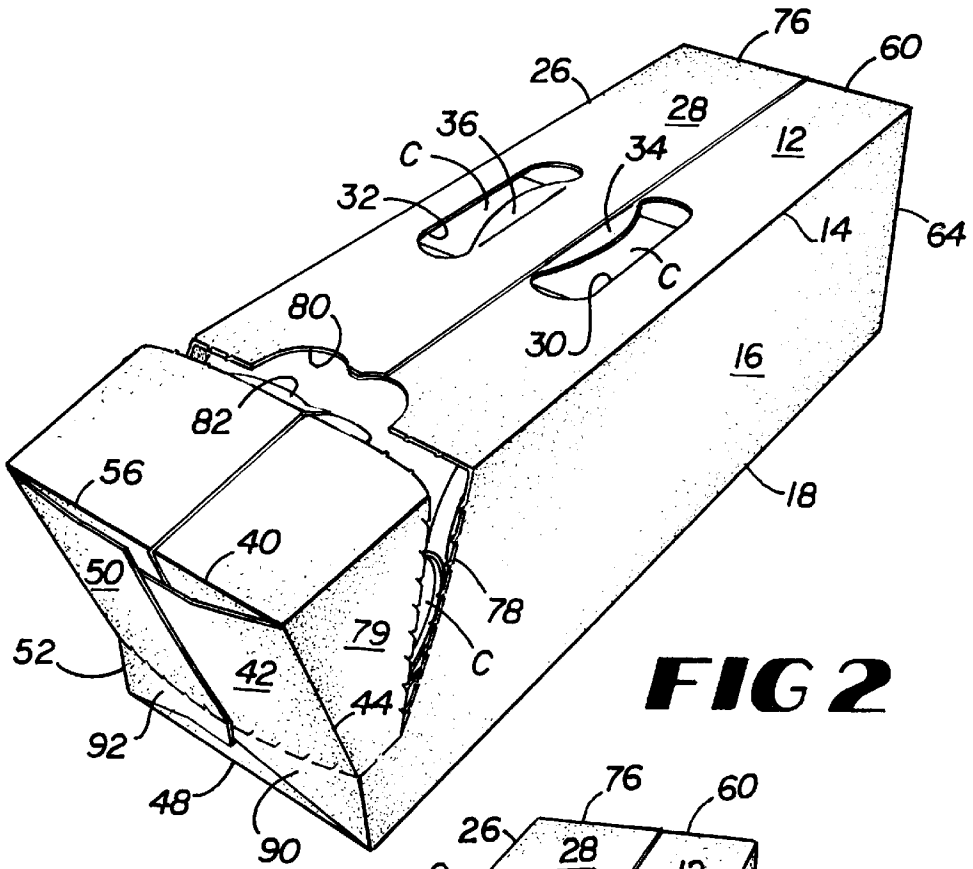


FIG 2

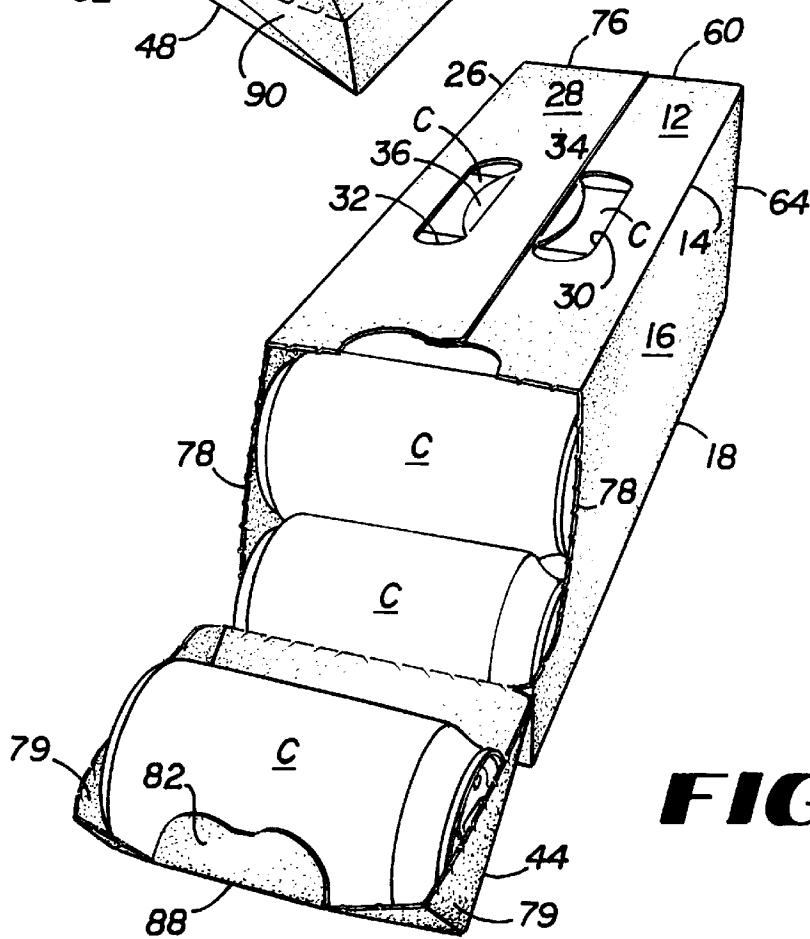


FIG 3

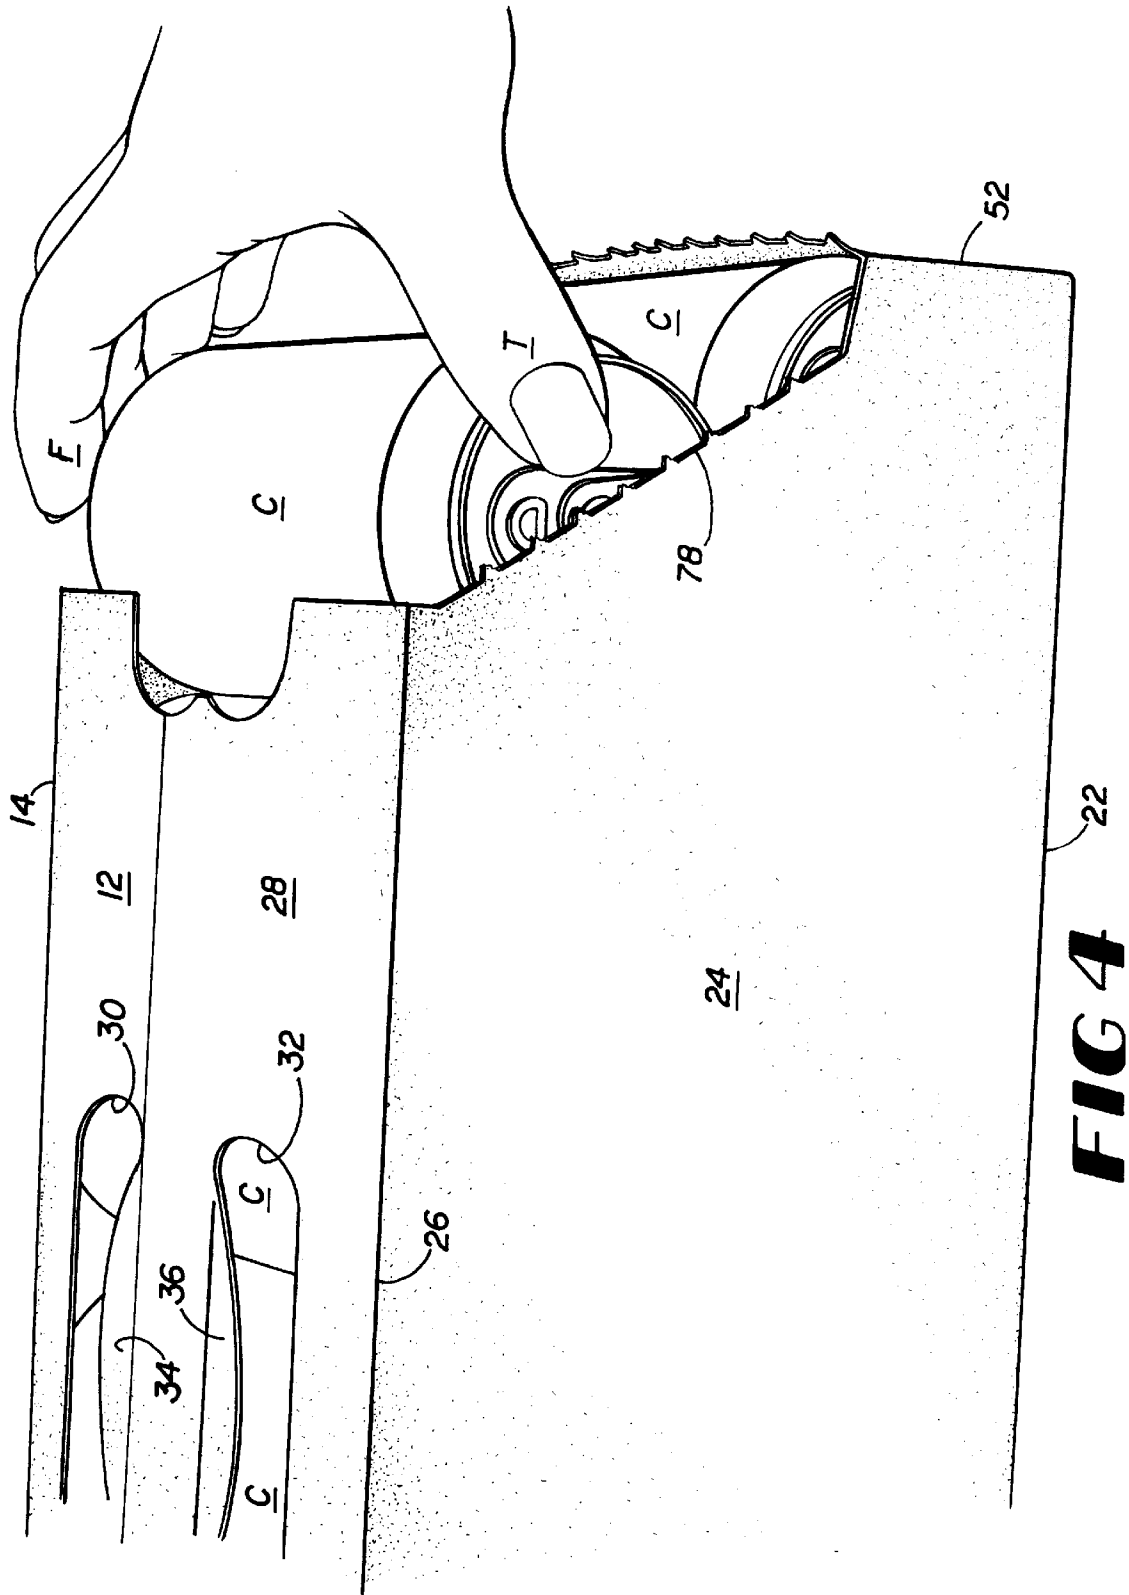


FIG 4

CARTON WITH AN IMPROVED DISPENSING FEATURE

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to an enclosed paperboard carton capable of enclosing containers, which carton has a unique opening and dispensing feature that allows the containers, for example, cans or bottles, to be removed or dispensed without destroying the overall structural integrity of the carton. The dispensing feature may also provide a safety net for the first container that is automatically dispensed when the carton is opened. This dispensing feature also permits the carton to be carried from one location to another after the dispenser has been opened without the containers falling out of the carton.

2. Background

Fully enclosed carton capable of enclosing cans have been used in the past that have a feature for dispensing the cans one at a time. Dispenser sections have been provided at various locations within these cartons depending on the design. Many of these dispensers suffer from the disadvantage that once open, they allow all of the containers to roll out. In addition, it is difficult to carry one of these cartons without the containers falling out once the dispenser has been opened. Most of these dispensers have been designed for dispensing cans or bottles which have cylindrical tops and bottoms of substantially the same size and configuration. These dispensers are not suitable for dispensing bottles that have a neck of smaller diameter than the body of the bottle.

In effect, many of these dispensers destroy the overall carton integrity once they have been opened. Many of these dispensing features do not have any means for preventing the first container that is automatically dispensed from falling free from the carton. In other words, its dispensing feature has no safety net.

3. Prior Art

U.S. Pat. No. 3,265,283 to Farguhar discloses a fully enclosed carton having a dispenser for dispensing the enclosed cans. The end wall of the carton has a dispensing flap which can be folded down upon opening. An aperture formed by the flap extends into the side walls to permit grasping of the can to withdraw it from the carton. When the flap is opened, the cans are held in the carton by an accurate flap portion extending downwardly in the end wall into the center of the aperture. The structural integrity of this carton is compromised because the entire bottom end of the carton is opened. The dispensing flap does not provide a safety net to prevent a can from rolling out of the carton and falling to the floor. This carton cannot be easily moved from one location to another after the dispenser has been opened without the containers falling out. It will be realized that the design of this carton is not satisfactory for dispensing bottles with necks as the exiting container being dispensed needs to have a corresponding cylindrical top and bottom of approximately the same size to facilitate easy dispensing by a person grasping the ends of the exiting container.

U.S. Pat. No. 4,364,509 to Holley, Jr. et al. also discloses a fully enclosed carton with a dispenser in one of the end walls. This dispenser is likewise formed in the end wall by tearing out an end flap and lowering it into proper position. Expansion slits are provided in the side wall for the user's fingers to grasp the ends of the exiting can. This carton is not

adapted for use with bottles, because of the necessity of grasping the ends of the container for removal. In addition, it is not adapted for carrying cans once the carton has been opened as they are likely to roll out of the dispenser. There is also no safety net to receive the cans as they are rolled out of the dispenser.

SUMMARY OF THE INVENTION

It is an object of this invention to provide a dispenser that preserves the integrity of the carton after the dispenser has been opened. It is a further object to provide a dispenser that can be used with both cans and bottles. It is another object of this invention to provide a safety net or basket for the containers that are automatically dispensed when the dispenser is opened. It is a still further object of this invention is to develop a dispenser that will permit the carton to be moved from one location to another after it has been opened without discharging containers. The final object of this invention is to provide a dispenser that can be easily opened.

Briefly described, in a preferred form, the objects of this invention are achieved by providing an enclosed carton that has a unique dispenser in the exiting end of the carton. This carton is generally rectangular and has a bottom, a top, two sides, a closed end and an exiting end. The carton is foldably constructed from a blank having panels and flaps. The exiting end or ends of the carton permits containers to be taken from the carton via the dispenser.

This carton has a dispenser that is torn from an end of the carton by tearing an end portion of the top panel, a triangular portion from the adjoining side panels, and all of the side end flaps except the bottom most portions, to form a dispenser. The top end flap is removed when this dispenser is opened. This dispenser may have a semi-circular score line attached to the dispenser score line in the top panel for easy opening of the dispenser. A person's fingers can be inserted between this semi-circular score line and the dispenser to commence the opening of the dispenser. This semi-circular score line is placed so that when it is pushed open, a person's fingers will go between the first and second containers inside of the carton. A score line can be provided that bisects the semi-circular score line parallel to the longitudinal axis of the containers to permit ease of entry of a person's fingers. The bottom portions of the side end flaps are left intact to preserve the structural integrity of the carton and also to provide a wall to prevent an end container in the bottom of the carton from accidentally rolling out.

It should be realized that the dispenser does not have to be totally removed from the carton, as the score lines in the side and top panels can be broken and the dispenser flipped over along the score lines in the side end flaps to form a safety net or basket when the first container in the top of the carton rolls out of the dispenser. If the score line in the side end flaps is not broken, the dispenser can be reclosed.

This carton can be constructed by gluing, taping, stapling and the like, or by locking. The dispenser of this invention can be put in one end of the carton or in both ends. A dispenser can be torn from the carton and placed under the other end of the carton to elevate it to facilitate the removal of the containers from the carton. These and other objects, features, and advantages of the present invention will become more apparent upon reading the following specification in conjunction with the accompanying drawing figures.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a plan view of a blank from which a carton according to this invention is formed.

3

FIG. 2 is a perspective end view of the carton loaded with cans showing the dispenser being partially opened.

FIG. 3 is a perspective end view of the carton containing cans with the basket shaped dispenser open but attached and containing a can.

FIG. 4 is a perspective side view of the carton containing cans showing the top most end can being gripped by hand for removal from the carton.

FIG. 5 is a plan view of the blank from which a carton according to this invention is formed having a single handle opening with the bottoms flaps being designed to be glued together.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is intended primarily for use with cans and bottles of the types used to contain soft drinks, beer and the like. The blank 10 is formed from a foldable sheet material, such as paperboard. The blank has a top flap 12 which is connected by fold line 14 to side panel 16, which in turn is connected by fold line 18 to bottom panel 20. Bottom panel 20 is connected by fold line 22 to side panel 24, which in turn is connected by fold line 26 to top flap 28.

This carton is capable of containing cans or bottles in two rows of six containers each. This carton has the "racetrack" handle 30 and 32 formed in the top flaps, 12 and 28, respectively. Cushioning flaps 34 and 36 are provided for the comfort of a person's hands, and are foldably joined to top flaps 12 and 28. On the exiting end of the carton, top end flap 38 is joined to top flap 12 by fold line 40. Side end flap 42 is joined to side panel 16 by fold line 44. Bottom end flap 46 is joined to bottom panel 20 by fold line 48. Side end flap 50 is joined by fold line 52 to side panel 24. Top end flap 54 is joined to top flap 28 by fold line 56.

On the closed end of the carton, top end flap 58 is connected to top flap 12 by fold line 60, side end flap 62 is connected to side panel 16 by fold line 64, bottom end flap 66 is attached to bottom panel 20 by fold line 68, side end flap 70 is connected to side panel 24 by fold line 72 and top end flap 74 is connected to top flap 28 by fold line 76.

It will be understood by those skilled in the art that the carton of the present invention is generally symmetrical about a horizontal line of bisection, as viewed when FIG. 1 is rotated lengthwise. This symmetry aids in the efficient production of the present carton.

In forming this blank 10 into a carton, top flap 12 is glued to top flap 28 forming a sleeve. The cans or bottles are then loaded into the carton on their sides and the various end flaps on both ends are closed. Using one end as an example, top end flaps 38 and 54 are folded downwardly and bottom end flap 46 is folded upwardly and then side end flaps 42 and 50 are folded sideways. These various end flaps are held together by glue or other means. The other end of the carton is glued and closed in the same fashion.

When the blank is folded and glued, the resulting carton has a closed end and an exiting end. However, a dispenser can be placed on both ends of the cartons. The containers exit the carton through the exiting end of the carton. The exiting end of the carton has a tear line 78 that extends through the top flaps 12 and 28, through the side panels 16 and 24 to form a triangular dispensing flap on the dispenser 79 into the side end flaps 42 and 50. In order to facilitate the opening of this dispenser 79, a finger flap 82 may be provided for the easy insertion of the fingers to start the tearing of the dispenser 79. Finger flap 82 is connected to top

4

flaps 12 and 28 by tear line 80. Finger flap 82 may be provided with insertion flap 86 to facilitate entry of the fingers into the carton. For the opening of the dispenser 79, insertion flap 86 is connected to finger flap 82 by fold line 84. Finger flap 82 and insertion flap 86 are connected to the dispenser 79 by fold line 88 which interrupts the tear line 78. It will be noticed that tear line 78 extends into side end flaps 42 and 50 so as to form a substantial bottom portion 90 and 92 so that the end of the carton will have a bottom end when the dispenser 79 is opened.

FIG. 2 shows the carton full of cans with the dispenser 79 open except for the tear lines 78 through the side end flaps 42, 50. It will be noted that the dispenser is a unitary structure. The dispenser 79 is opened by a person inserting his or her fingers into finger flap 82 and pulling the dispenser 79 open. Insertion flap 86 is provided to facilitate the entry of the fingers into the opening provided by finger flap 82. Finger flap 82 and insertion flap 86 are placed so that the fingers will enter the interior of the carton between the first and second cans.

FIG. 3 shows the dispenser 79 completely opened but still attached to the carton by tear line 78 not being tom open through side end flaps 42 and 50. When the dispenser 79 is completely opened, the top can C will fall into the basket formed by the dispensing flap 79 and be retained. This dispenser 79 serves as a safety net to prevent the can from leaving the vicinity of the carton. The dispenser 79 forms a basket with triangular flaps forming side walls, side end flaps 42 and 50 forming a bottom wall and the tom off portions of the top flaps 12 and 28 forming an end wall.

In order to maintain the structural integrity of this carton, the bottom portions 90 and 92 of the side end flaps 42 and 50 are not removed from the carton when the dispenser is removed. The structural integrity of the carton is improved by the fact that the bottom end flap 46 is not removed. The bottom end flap 46 has a height H approximately equal to the distance between A and B along fold lines 44 and 52 respectively. This means that the bottom end flap 46 has the same height as the bottom portions 90 and 92 of the side end flaps 42 and 50, thus producing a strong bottom end structure. As shown in FIGS. 3 and 4, the height of the bottom end structure formed by 46, 90 and 92 is less than the diameter of a can C.

If desired, the dispenser 79 can be totally removed from carton or left attached along tear line 78 in side flaps 42 and 50 and reclosed.

As illustrated in FIG. 4, a can C can be easily removed from the carton by using the fingers F and the thumb T of a hand.

FIG. 5 is a plan view of a blank from which a carton containing cans in three rows of four cans each according to the invention is formed. This carton has a single slot handle for carrying. The blank 110 has a bottom flap 112 which is connected by fold line 114 to side panel 116, which in turn is connected by fold line 118 to top panel 120. Top panel 120 in turn is connected by fold line 122 to side panel 124 which in turn is connected by fold line 126 to bottom flap 128. On the closed end of the carton, bottom end flap 130 is foldably connected by fold line 132 to bottom flap 112. Side end flap 134 is connected by fold line 136 to side panel 116. Top end flap 138 is connected by fold line 140 to top panel 120. Side end flap 142 is connected by fold line 144 to side panel 124 and bottom end flap 146 is connected by fold line 148 to bottom flap 128. The exiting end of the carton has a bottom end flap 150 which is connected to bottom flap 112 by fold line 152. Side end flap 154 is connected by fold line 156 to

side panel 116. Top end flap 158 is connected by fold line 160 to top panel 120. Side end flap 162 is connected by fold line 164 to side panel 124. Bottom end flap 166 is connected by fold line 168 to bottom flap 128.

This carton has a slot handle 170 formed by: cut line 172 and fold lines 174 and 176. It also has a score line 178 to assist in dissipating the forces involved in lifting a loaded carton.

A dispenser 180 is formed by tearing tear line 182 which extends from the top panel 120 through side panels 116, 124 and into side end flaps 154 and 162. Tear line 182 extends into side end flaps 154 and 162, so as to leave bottom portions 184, 186 that has a height when the carton is formed along lines 156, 164 respectively that is approximately equal to the height of bottom end flaps 150 and 166 in order to provide structural strength to the carton. This carton may have a finger flap 188 connected to dispenser 180 by fold line 190 and insertion flap 192 connected to finger flap 188 by fold line 194. Finger flap 188 and insertion flap 192 are joined to top panel 120 by tear line 196.

A sleeve from this carton is prepared by gluing the bottom flap 112 and 128 in an overlapping relationship. This carton is then loaded in the same manner as the carton shown in FIG. 2 through as the end of the cartons. Side end flaps 134, 142, 154, and 162 are glued over the bottom end flaps 130, 146, 150, 166 and top end flaps 138 and 158 to close the ends of the carton. The dispenser is opened in the same manner as the dispenser shown in FIGS. 1 and 2.

The dispenser of this invention can be used for both cans and other types of cylindrical containers. It is particularly useful for PET bottles having a stubby configuration.

UNIQUE FEATURES OF THE DISPENSER OF THIS INVENTION

One of the unique features of the dispenser of this invention is that it provides easy access to the cans or bottles in the carton but yet does not greatly diminish the structural integrity of the carton. This is partly because the bottom end of the end panel in which the dispenser is located is retained. This accomplished by leaving a bottom portion on the side end panel that is equal in height to the bottom end flaps.

The dispenser of this invention provides an easy opening feature in that it has a finger flap and insertion flap so that a person's fingers can be inserted between the first and second can to open the dispenser.

This dispenser also provides a safety net or basket in that if the tear line for the dispenser is not torn along the side end flaps, it remains attached to the carton and can catch in its basket a can as it is removed from the carton.

While the invention has been disclosed in its preferred forms, it will be apparent to those skilled in the art that many modifications, additions, and deletions can be made therein without departing from the spirit and scope of the invention and its equivalents as set forth in the following claims.

What is claimed is:

1. An enclosed carton for carrying a plurality of containers in two rows, with a top and a bottom row, with each container having a diameter, the carton having two ends, at least one of which is an exiting end capable of permitting containers to exit the carton one at a time, the carton comprising:

- a. a bottom panel, top panel and foldably attached adjoining side panels;
- b. said exiting end having a bottom end flap with a height that is less than the diameter of a container to be

contained in the bottom row and which is attached by a fold line to the bottom panel, a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel, and means for attaching said flaps together to close the exiting end of the carton;

- c. said exiting end having a tear line for forming a container dispenser opening, said tear line extending through the top panel at a distance spaced from the exiting end and extending at an angle through each side panel towards the exiting end to the attachment of said side panel with a side end flap at a distance greater from the top panel than the bottom panel, with a fold line extending through each side end flap at a distance from the bottom panel approximately equal to the height of the bottom end flap, so that when the tear line is torn, a dispenser opening is formed for dispensing the containers, with the dispenser remaining attached to the carton by the fold line through each side end flap, so that the bottom end flap and a portion of each side end flap adjacent to the bottom end flap remain attached to the carton to provide structural integrity to the carton, said dispenser forming a basket for catching containers exiting the carton; and
- d. means for closing any end of the carton that is not an exiting end.

2. The carton of claim 1 in which the tear line in the top panel extends away from the exiting end for a portion of its extension across the top panel to form a finger flap foldably attached to the dispenser to facilitate commencing opening the dispenser in the top panel between the first and second containers from the exiting end.

3. The carton of claim 1 in which glue is used to close both ends of the carton.

4. The carton of claim 1 in which there is only one exiting end.

5. The carton of claim 1 in which both ends are exiting ends.

6. An enclosed carton for carrying a plurality of containers in two rows, with a top and bottom row, each container having a diameter, the carton having two ends, at least one of each is an exiting end capable of permitting containers to exit the carton one at a time, the carton comprising:

- a. a bottom panel, top panel and foldably attached adjoining side panels;
- b. said exiting end having a bottom end flap with a height that is less than the diameter of a container to be contained in the bottom row and which is attached by a fold line to the bottom panel, a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel, and means for attaching said flaps together to close the exiting end of the carton;
- c. said exiting end having a tear line for forming a container dispenser, said tear line extending through the top panel at a distance spaced from the exiting end and extending at an angle through each side panel towards the exiting end to the attachment of said side panel with a side end flap at a distance greater from the top panel than the bottom panel, said tear line extending through each side end flap at a distance from the bottom panel approximately equal to the height of the bottom end flap so that an opening for dispensing containers is formed when the tear line is torn, said bottom end flap and the bottom portion of each side end flap remaining attached to the carton to provide structural integrity to the carton; and
- d. a means for closing any end of the carton that is not an exiting end.

7

7. The carton of claim 6 which is only capable of carrying six (6) containers in each row.

8. The carton of claim 6 in which the tear line through the top panel is generally parallel to the exiting end of the carton.

9. The carton of claim 6 in which the tear line in the top panel extends away from the exiting end for a portion of its extension across the top panel to form a finger flap foldably attached to the dispenser to facilitate commencing opening the dispenser in the top panel between the first and second containers from the exiting end.

10. The carton of claim 6 in which glue is used to close both ends of the carton.

11. The carton of claim 6 in which there is only one exiting end.

12. The carton of claim 6 in which both ends are exiting ends.

13. A dispenser for cartons for carrying a plurality of containers in two rows, with a top and bottom row, with each container having a diameter, wherein said carton has two ends, at least one of which is an exiting end capable of permitting containers to exit the carton one at a time, the dispenser being a part of a carton comprising:

- a. a bottom panel, a top panel and foldably attached adjoining side panels;
- b. said exiting end having a bottom end flap having a height that is less than the diameter of a container to be contained in the bottom row and which is attached by a fold line to the bottom panel, a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel, and means for attaching said flaps together to close the exiting end of the carton; and
- c. a means for closing any non-exiting end of the carton wherein said dispenser is formed in the exiting end of the carton, said dispenser having a top wall formed from a portion of the top panel adjacent the exiting end, a side wall formed from a portion of each side panel adjacent the exiting end, said side wall having an edge that extends at an angle towards the exiting end to the attachment of said side panel with a side end flap at a distance greater from the top panel than the bottom panel when the dispenser is a part of the carton, and when the dispenser is open it remains attached to the carton, said dispenser forming a basket for catching containers exiting the carton.

14. The dispenser of claim 13 which has a finger flap foldably attached to the top wall.

15. An enclosed carton for carrying a plurality of containers in two rows, with a top and bottom row, the carton having two ends, at least one of which is an exiting end capable of permitting containers to exit the carton one at a time, the carton comprising:

- a. a bottom panel, top panel and foldably attached adjoining side panels;
- b. an exiting end having a bottom end flap with a height to prevent the containers contained in the bottom row from rolling out when the carton is placed on a horizontal surface and which is attached by a fold line to the bottom panel, a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel, and means for attaching said flaps together to close the exiting end of the carton;
- c. said exiting end having a tear line for forming a container dispenser, said tear line extending through the top panel at a distance spaced from the exiting end and

8

extending at an angle through each side panel towards the exiting ends to the attachment of said side panel with a side end flap at a distance greater from the top panel than the bottom panel, said tear line extending through each side end flap at a distance from the bottom panel approximately equal to the height of the bottom end flap so that an opening for dispensing containers is formed when the tear line is torn, said bottom end flap and the bottom portion of each side end flap remaining attached to the carton to provide structural integrity to the carton; and

d. a means for closing any end of the carton that is not an exiting end.

16. An enclosed carton for carrying a plurality of containers in only two rows, with a top and a bottom row, the carton having two ends, at least one of which is an exiting end capable of permitting containers to exit the carton one at a time, the carton comprising:

- a. a bottom panel, top panel and foldably attached adjoining side panels;
- b. said exiting end having a bottom end flap which is attached by a fold line to the bottom panel, a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel, and means for attaching said flaps together to close the exiting end of the carton;
- c. said exiting end having a tear line for forming a container dispenser opening, said tear line extending through the top panel at a distance spaced from the exiting end, from said top panel through each side panel towards the exiting end to the attachment of said side panel with a side end flap, and then through each side end flap, the tear line through each side end flap being at such a distance from the bottom panel that when the carton is on a horizontal surface and the dispenser is opened, the height of the side end flaps between the tear line therethrough and the bottom panel prevents the end container in the bottom row from accidentally rolling out of the carton, the dispenser remaining attached to the carton by the tear line through each side end flap, said dispenser forming a basket for catching containers exiting the carton; and
- d. means for closing any end of the carton that is not an exiting end.

17. The carton of claim 16 in which the tear line in the top panel extends away from the exiting end for a portion of its extension across the top panel to form a finger flap foldably attached to the dispenser to facilitate commencing opening the dispenser in the top panel between the first and second containers from the exiting end.

18. The carton of claim 16 in which glue is used to close both ends of the carton.

19. The carton of claim 16 in which there is only one exiting end.

20. The carton of claim 16 in which both ends are exiting ends.

21. The carton of claim 16, wherein the containers are cylindrical, and said height of the side end flaps between the tear line therethrough and the bottom panel is less than the diameter of the end container in the bottom row.

22. The carton of claim 16, wherein the height of the bottom end flap is approximately equal to the height of the side end flaps between the tear line therethrough and the bottom panel.

23. An enclosed carton for carrying a plurality of containers in only two rows, with a top and bottom row, the

carton having two ends, at least one of which is an exiting end capable of permitting containers to exit the carton one at a time, the carton comprising:

- a. a bottom panel, top panel and foldably attached adjoining side panels;
 - b. said exiting end having a bottom end flap which is attached by a fold line to the bottom panel, a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel, and means for attaching said flaps together to close the exiting end of the carton;
 - c. said exiting end having a tear line for forming a container dispenser, said tear line extending through the top panel at a distance spaced from the exiting end, through each side panel towards the exiting end to the attachment of said side panel with a side end flap, and then through each side end flap, the tear line through each side end flap being at such a distance from the bottom panel that when the carton is on a horizontal surface and the dispenser is opened, the height of the side end flaps between the tear line therethrough and the bottom panel prevents the end container in the bottom row from accidentally rolling out of the carton, said bottom end flap and the bottom portion of each side end flap remaining attached to the carton to provide structural integrity to the carton; and
 - d. a means for closing any end of the carton that is not an exiting end.
- 24.** The carton of claim **23** which can only carry six (6) containers in each row.
- 25.** The carton of claim **23** in which the tear line through the top panel is generally parallel to the exiting end of the carton.
- 26.** The carton of claim **23** in which the tear line in the top panel extends away from the exiting end for a portion of its extension across the top panel to form a finger flap foldably attached to the dispenser to facilitate commencing opening the dispenser in the top panel between the first and second containers from the exiting end.
- 27.** The carton of claim **23** in which glue is used to close both ends of the carton.
- 28.** The carton of claim **23** in which there is only one exiting end.
- 29.** The carton of claim **23** in which both ends are exiting ends.
- 30.** A dispenser for cartons for carrying a plurality of containers in only two rows, with a top and bottom row, with each container having a diameter, wherein said carton has two ends, at least one of which is an exiting end capable of permitting containers to exit the carton one at a time, the dispenser being a part of a carton comprising:
- a. a bottom panel, a top panel and foldably attached adjoining side panels;
 - b. said exiting end having a bottom end flap which is attached by a fold line to the bottom panel, a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel, and means for attaching said flaps together to close the exiting end of the carton; and
 - c. means for closing any non-exiting end of the carton wherein said dispenser is formed in the exiting end of the carton;
 - d. said dispenser having a top wall formed from a portion of the top panel adjacent the exiting end, side walls formed from a portion of each side panel adjacent the exiting end, each said side wall having an edge that

extends towards the exiting end to a point on the foldable attachment of said side panel to a side end flap, said point being at a distance greater from the top panel than the bottom panel when the dispenser is a part of the carton, and when the dispenser is open it remains attached to the carton, said dispenser forming a basket for catching containers exiting the carton.

31. The dispenser of claim **30** which has a finger flap foldably attached to the top wall.

32. The dispenser of claim **30**, wherein the height of the bottom end flap is approximately equal to the distance between said point and the bottom panel.

33. A carton for carrying a plurality of containers, which containers are of equal diameters and are aligned in only two rows, with a top and a bottom row, the carton having two ends, at least one of which is an exiting end for selectively dispensing the containers, the carton comprising:

- a bottom panel, a top panel and two foldably attached adjoining, side panels;
- said exiting end having a bottom end flap which is foldably attached to the bottom panel, a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel, and closure means for attaching said flaps together to close the exiting end of the carton;

said exiting end having a tear line for forming a container dispenser opening, said tear line extending through the top panel at a distance spaced from the top end flap at the exiting end, said tear line extending through each side panel to the attachment of said side panel with a side end flap, and then through each side end flap, the tear line through each side end flap being at a distance from the bottom panel which is less than the diameter of a container.

34. The carton of claim **33**, in which the tear line in the top panel extends away from the exiting end for a portion of its extension through the top panel to form a finger flap.

35. The carton of claim **34**, wherein the finger flap is located in the top panel between the first and second containers from the exiting end.

36. The carton of claim **33**, in which the closure means comprises glue.

37. The carton of claim **33**, in which there is only one exiting end.

38. The carton of claim **33**, in which both ends are exiting ends.

39. The carton of claim **33**, and a closed end opposite said exiting end.

40. The carton of claim **33**, and a closed end having a bottom end flap which is foldably attached to the bottom panel a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel and closure means for attaching said flaps together to close the closed end of the carton.

41. The carton of claim **40**, and a flap defined adjacent to said tear line.

42. The carton of claim **40**, said tear line running across said top panel in a direction substantially parallel to said exiting end, then deviating from said parallel direction to define a flap which is adjacent to said tear line.

43. An enclosed carton for enclosing containers, each having identical diameters and which are configured in only two rows, and for selectively dispensing the containers, the carton having a first end and a second end, and comprising:

- a top panel, a first side panel foldably attached to a first side of said top panel, a second side panel foldably attached to a second side of said top panel, and a bottom

11

panel foldably attached to both the first side panel and to the second side panel;

at the first end of the carton, a first bottom flap foldably attached to said bottom panel, a first side flap foldably attached to said first side panel, a second side flap foldably attached to said second side panel and a first top flap foldably attached to said top panel;

closure means for attaching together said carton flaps at said first end;

at the second end of the carton, a second bottom flap foldably attached to said bottom panel, a third side flap foldably attached to said first side panel, a fourth side flap foldably attached to said second side panel and a second top flap foldably attached to said top panel;

closure means for attaching together said carton flaps at said second end;

a tear line defined in said carton nearer to said first end than to said second end, said tear line extending across said top panel from said first side panel to said second side panel, said tear line also extending across said first side panel to said first side flap and across said second side panel to said second side flap; said tear line then extending across said first side flap and across said second side flap to define a dispenser at said first end which can be selectively removed from said carton along said tear line to leave first and second side flap portions; said carton including a bottom end structure comprising said first bottom end flap and said first and

12

second side flap portions, said bottom end structure having a height which is less than the diameter of a container.

44. The carton of claim 43, in which the tear line in the top panel extends away from the first end for a portion of its extension across the top panel to form a finger flap to facilitate commencing opening the dispenser.

45. The carton of claim 44, wherein the finger flap is located in the top panel between the first and second containers from the first end.

46. The carton of claim 43, in which the closure means comprises glue.

47. The carton of claim 43, and a closed end opposite said exiting end.

48. The carton of claim 43, and third top flap attached to said top panel at said first end.

49. The carton of claim 48, and a fourth top flap attached to said top panel at said second end.

50. The carton of claim 48, and a finger flap defined adjacent to said tear line.

51. The carton of claim 50, said finger flap defined on said top panel and attached to said container dispenser.

52. The carton of claim 43, said tear line running across said top panel in a direction substantially parallel to said exiting end, then deviating from said parallel direction to define a flap which is adjacent to said tear line and attached to said dispenser.

* * * * *



US006578736C1

(12) **INTER PARTES REEXAMINATION CERTIFICATE** (0178th)

United States Patent

Spivey

(10) **Number:** **US 6,578,736 C1**

(45) **Certificate Issued:** **Jul. 20, 2010**

(54) **CARTON WITH AN IMPROVED DISPENSING FEATURE**

3,669,251 A 6/1972 Phillips
3,765,527 A 10/1973 Vargo
3,913,739 A 10/1975 Hennessey

(75) Inventor: **Raymond Rudolph Spivey**, Mableton, GA (US)

(Continued)

(73) Assignee: **The Chase Manhattan Bank**, Houston, TX (US)

FOREIGN PATENT DOCUMENTS

CA 874828 7/1971
CA 2246020 2/2000
DE 2 323 589 A 11/1974
DE 76 06 493 U1 6/1976
DE 29 33 022 C2 2/1980
DE 30 07 769 C2 9/1981
DE 81 35 176 U1 6/1982
DE 8514718 6/1985
DE G 8629664.7 7/1987
DE 40 23 043 A1 12/1991

Reexamination Request:

No. 95/000,076, Feb. 17, 2005

Reexamination Certificate for:

Patent No.: **6,578,736**
Issued: **Jun. 17, 2003**
Appl. No.: **09/757,714**
Filed: **Jan. 9, 2001**

(Continued)

(51) **Int. Cl.**
A47F 1/04 (2006.01)

OTHER PUBLICATIONS

Riverwood International Corporation v. MeadWestvaco Corporation, Civil No. 1:03-CV-1672 (TWT) (N.D. Ga.), Motion for Preliminary Injunction, dated Jun. 24, 2003.
Riverwood International Corporation v. MeadWestvaco Corporation, Civil No. 1:03-CV-1672 (TWT) (N.D. Ga.), MeadWestvaco's Memorandum in Opposition to Riverwood's Motion for a Preliminary Injunction, dated Jun. 24, 2003.

(52) **U.S. Cl.** **221/305; 229/221**
(58) **Field of Classification Search** None
See application file for complete search history.

(Continued)

(56) **References Cited**


U.S. PATENT DOCUMENTS

902,347 A 10/1908 Tillinghast
1,925,102 A 9/1933 Levkoff
2,448,819 A 9/1948 Mitchell
2,718,301 A 9/1955 Palmer
2,868,431 A 1/1959 Painter
2,990,097 A 6/1961 Thompson
3,002,651 A 10/1961 Gauld
3,018,031 A 1/1962 Ahlbor et al.
3,178,242 A 4/1965 Ellis
3,228,582 A 1/1966 Osberg
3,332,594 A 7/1967 Capua
3,599,858 A 8/1971 Samsing

Primary Examiner—Jimmy G Foster

(57) **ABSTRACT**

A carton with an improved dispenser at one of the carton which preserves the integrity of the carton when the carton is opened by permitting a bottom end flap attached to the bottom panel to remain in place and also a portion of each side end flap that is adjacent to the bottom end flap. This dispenser may also provide a safety net for the first container that is automatically dispensed when the carton is opened.

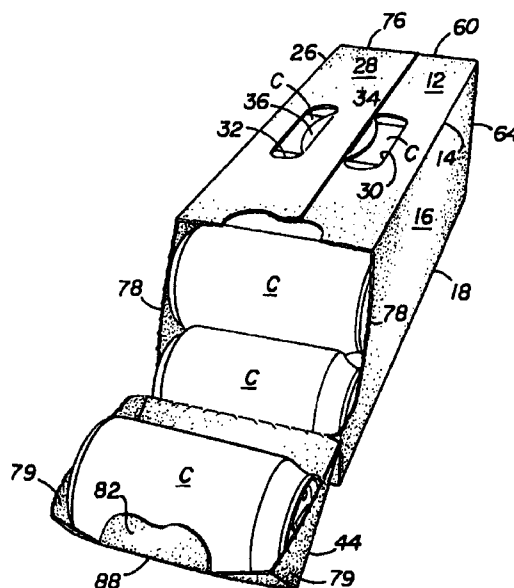

U.S. PATENT DOCUMENTS

3,942,631	A	3/1976	Sutherland et al.
D243,508	S	3/1977	Killy
D252,259	S	7/1979	Rinehart
D263,204	S	3/1982	Dutcher
4,325,482	A	4/1982	Feeser
D269,068	S	5/1983	Mann et al.
D270,041	S	8/1983	Vestal
4,411,365	A	10/1983	Horikawa et al.
4,416,410	A	11/1983	Herrmann
4,498,581	A	2/1985	Dutcher
4,560,062	A	12/1985	Valiulis
4,582,199	A	4/1986	Schuster
D286,987	S	12/1986	Golan et al.
4,785,991	A	11/1988	Schuster
4,817,866	A	4/1989	Wonnacott
D303,090	S	8/1989	Armor et al.
4,860,944	A	8/1989	Wonnacott
4,966,324	A	10/1990	Steel
4,972,991	A	11/1990	Schuster
4,981,253	A	1/1991	Quaintance
5,002,186	A	3/1991	Cooper
5,031,825	A	7/1991	Romagnoli
5,067,615	A	11/1991	Davitian
5,101,642	A	4/1992	Alexandrov
D332,915	S	2/1993	Hoell et al.
5,277,360	A	1/1994	DeMott
5,284,292	A	2/1994	Johnson
5,427,242	A	6/1995	Oliff et al.
5,465,831	A	11/1995	Smith
5,505,372	A	4/1996	Edson
5,518,111	A	5/1996	Stout
5,788,117	A	8/1998	Zimmanck
5,826,783	A	10/1998	Stout
5,833,118	A	11/1998	Weiss
5,873,515	A	2/1999	Dunn et al.
5,881,884	A	3/1999	Podosek
D436,859	S	1/2001	Botsford et al.
6,386,369	B2	5/2002	Yuhas et al.
6,435,351	B1	8/2002	Gibb
6,478,219	B1	11/2002	Holley, Jr.
6,484,903	B2	11/2002	Spivey et al.
6,550,615	B2	4/2003	Lingamfelter
6,578,736	B2	6/2003	Spivey
6,631,803	B2	10/2003	Rhodes et al.
2002/0185527	A1	12/2002	Bates
2003/0141353	A1	7/2003	Wilson

FOREIGN PATENT DOCUMENTS

DE	94 12 885	U1	11/1994
DE	94 13 813	U1	11/1994
DE	295 19 931	U1	4/1996
DE	296 02 010	U1	5/1996
DE	299 09 008	U1	10/1999
DE	299 135 85	U1	11/1999

DE	694 21 620	T2	11/1999
EP	235 852	B1	9/1987
EP	0 323 596	A1	7/1989
EP	0 342 088	B1	11/1989
EP	0 475 147	A1	3/1992
EP	0 659 143	B1	6/1995
EP	752 370	A2	1/1997
EP	936 995	B1	8/1999
EP	1 060 998	A2	12/2000
GB	2186550		8/1987
JP	7-9721		2/1995
WO	WO 88/09750		12/1988
WO	WO 95/25668		9/1995
WO	WO 98/31593		7/1998
WO	WO 99/64301		12/1999
WO	WO 00/23334		4/2000
WO	WO 00/71428	A1	11/2000
WO	WO 01/28871	A1	4/2001
WO	WO 02/04302	A1	1/2002
WO	WO 02/085739	A1	10/2002

OTHER PUBLICATIONS

Riverwood International Corporation v. MeadWestvaco Corporation, Civil No. 1:03-CV-1672 (TWT) (N.D. Ga.), Riverwood's Brief in Reply to MeadWestvaco's Memorandum in Opposition to Plaintiff's Motion for Preliminary Injunction, dated Jul. 18, 2003.

Riverwood International Corporation v. MeadWestvaco Corporation, Civil No. 1:03-CV-1672 (TWT) (N.D. Ga.), Riverwood's Supplemental Pre-Hearing Brief in Support of Plaintiff's Motion for Preliminary Injunction, dated Aug. 29, 2003.

Memorandum In Support of Conditional Motion to Stay Proceedings Pending Inter Partes Reexamination of U.S. Patent No. 6,789,673; filed Jan. 25, 2005 on behalf of Graphic Packaging International, Inc.; Civil Action No. 1-04-CV-0842 (JEC) (USDC N.D.GA); pp. 1 and 3.

"Dispensing Multipack, Coke Canner Rolls Out 'Fridge-Friendly' Pack," *Packaging World*, Sep. 2001, p. 2, [Summit Publishing Company-Chicago].

"Hot Hit with Consumers," *International Bottler & Packer*, Nov. 2001 [Binstead Publications Ltd.].

"Coke Bottler Tests a Slimmer Soda Package," *Wall Street Journal B3* (Aug. 10, 2001).

"Passing the Torch," *Beverage World*, p. 36 (Oct. 2002).

"Riverwood" for the Carton Designated as Fridge Pack, *International Bottler & Packer*, Nov. 2001 [Binstead Publications Limited—United Kingdom].

"Coca-Cola Fridge Mate," p. 3 *Revise Woolsworth's Advertisement wca4000/N1A*.

The American College Dictionary, Copyright 1961, by Random House, Inc., p. 836.

1

**INTER PARTES
REEXAMINATION CERTIFICATE
ISSUED UNDER 35 U.S.C. 316**

THE PATENT IS HEREBY AMENDED AS
INDICATED BELOW.

Matter enclosed in heavy brackets [] appeared in the patent, but has been deleted and is no longer a part of the patent; matter printed in italics indicates additions made to the patent.

AS A RESULT OF REEXAMINATION, IT HAS BEEN DETERMINED THAT:

The patentability of claims **2, 9, 17, 26, 35, 45** and **48-51** is confirmed.

Claims **1, 3-6, 12-16, 18-23, 29-34, 38, 43** and **44** are cancelled.

Claims **7, 8, 10, 11, 24, 25, 27, 28, 36, 37, 39-41, 46, 47** and **52** are determined to be patentable as amended.

Claim **42**, dependent on an amended claim, is determined to be patentable.

7. The carton of claim **[6]** *9*, which is only capable of carrying six (6) containers in each row.

8. The carton of claim **[6]** *9*, in which the tear line through the top panel is generally parallel to the exiting end of the carton.

10. The carton of claim **[6]** *9*, in which glue is used to close both ends of the carton.

2

11. The carton of claim **[6]** *9*, in which there is only one exiting end.

24. The carton of claim **[23]** *26*, which can only carry six (6) containers in each row.

5 **25.** The carton of claim **[23]** *26*, in which the tear line through the top panel is generally parallel to the exiting end of the carton.

27. The carton of claim **[23]** *26*, in which glue is used to close both ends of the carton.

10 **28.** The carton of claim **[23]** *26*, in which there is only one exiting end.

36. The carton of claim **[33]** *35*, in which the closure means comprises glue.

37. The carton of claim **[33]** *35*, in which there is only one exiting end.

15 **39.** The carton of claim **[33]** *35*, and a closed end opposite said exiting end.

40. The carton of claim **[33]** *35*, and a closed end having a bottom end flap which is foldably attached to the bottom panel a top end flap foldably attached to the top panel, a side end flap foldably attached to each side panel and closure means for attaching said flaps together to close the closed end of the carton.

41. The carton of claim **[40]** *35*, and a flap defined adjacent to said tear line.

20 **46.** The carton of claim **[43]** *45*, in which the closure means comprises glue.

47. The carton of claim **[43]** *45*, and a closed end opposite said exiting end.

25 **52.** The carton of claim **[43]** *48*, said tear line running across said top panel in a direction substantially parallel to said exiting end, then deviating from said parallel direction to define a flap which is adjacent to said tear line and attached to said dispenser.

* * * * *